


SPECIFICATION SHEET FOR EXIT SIGN

SER-800 Series



IP20

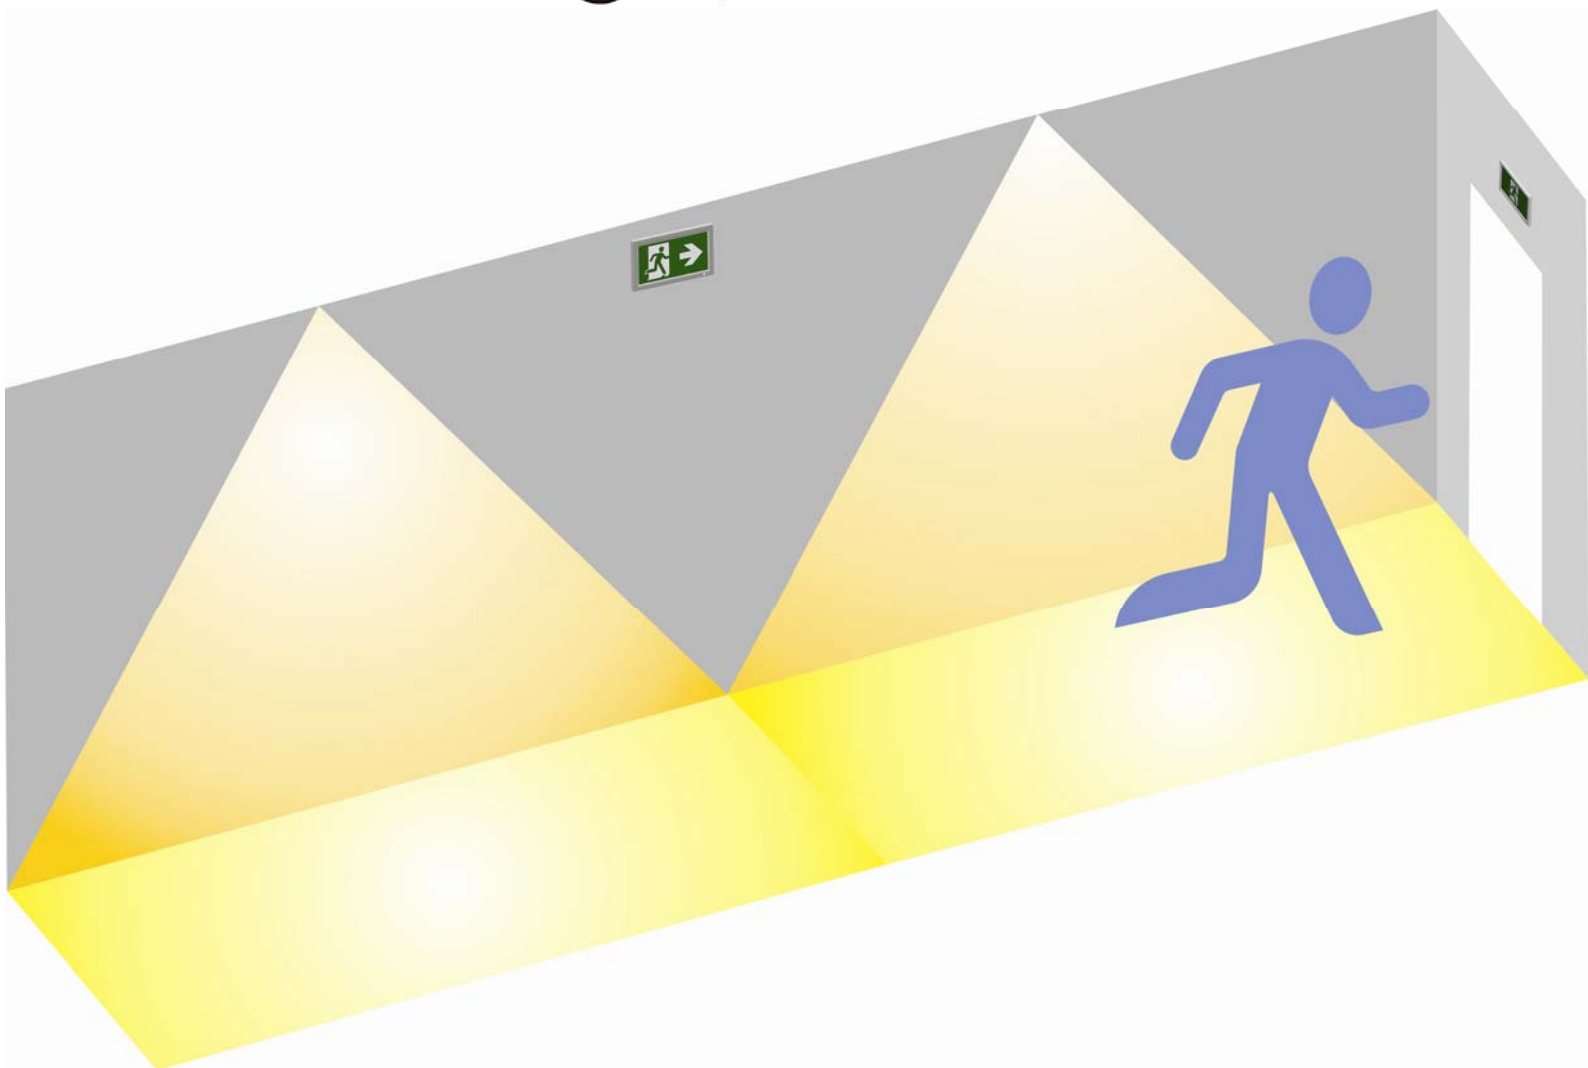

Je Woo Corporation,Ltd.
Dong Sheng Industrial Park, Dong Sheng Village, Chen Jiang
Subdistrict office, Zhong Kai High-Tech Development Zone, Hui
Zhou City, Guang Dong, P.R.C.
Tel: 86-752-312-5585
Fax: 86-752-312-5586 / 5587


Table Of Content

Revision History -----	1
Photo and Dimension -----	2
Feature -----	2
Technical Specification -----	2
Order Guide -----	3
Model List and Electrical Rating -----	4
Pictogram Pack -----	4
Packaging -----	4

Revision History

Revised Symbol	Revised Description	Version	Revised By	Revised Date
	New create	E.0	Wang Tao	2015.2.27

Photo and Dimension

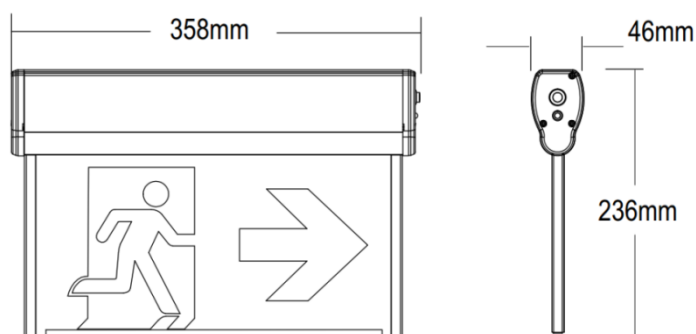

Feature

- Compact and decorative design.
- Ni-MH battery.
- Single and double face universal.
- Universal mounting including wall mount, end mounting, ceiling mounting and recessed kit option.
- Replaceable pictogram design, including arrow right, left, down pictograms in package.
- Low operation cost via low power consumption.
- CSA listed and meet standard C22.2 No 141-10 requirement.
- RoHS compliance.

Technical Specification

Rated Power Supply	120/347VAC 60Hz
Power consumption	Max. 5W
Charge time	24 hours
Discharge duration	1.5hour
Test facility	Manual test
Mounting	Wall mounting , Ceiling mounting, Recessed ceiling mounting
LED	SMD 2835, CCT 6000K, CRI>70
Luminance of safety sign	>10cd/m ²
Ambient temperature	10°C-40°C, suitable damp location
Insulation Class	Class I
Certification	CSA

Order Guide

Family	Series	Voltage	Housing color
SER: Surface RSER: Recessed	800: With battery 810: AC only	Blank: 120/347VAC UDC: 120/347VAC;6-24VDC	AL: Anodic aluminum oxide WH: white BK: black

Model List and Electrical Rating

Model	Normal Supply	Battery	Housing color
SER-800-AL/BK/WH	120/347Vac 60Hz	NI-MH 3.6V 400mAh	Anodic aluminum oxide, Black or white color
SER-810-AL/BK/WH	120/347Vac 60Hz	without battery	Anodic aluminum oxide, Black or white color
SER-810-UDC-AL/BK/WH	120/347Vac,60Hz; 6-24VDC	without battery	Anodic aluminum oxide, Black or white color
RSER-800-AL/BK/WH	120/347Vac 60Hz	NI-MH 3.6V 400mAh	Anodic aluminum oxide, Black or white color
RSER-810-AL/BK/WH	120/347Vac 60Hz	without battery	Anodic aluminum oxide, Black or white color
RSER-810-UDC-AL/BK/WH	120/347Vac,60Hz; 6-24VDC	without battery	Anodic aluminum oxide, Black or white color

Pictogram Pack



Arrow right 1pc



Arrow left 1pc



Without Arrow 1pc




Blank 1pc

Packaging

SER series

Q'TY: 6 PCS
N.W: 9.2 KGS
G.W: 10.5 KGS
MEA'S: 1.22 CUFT

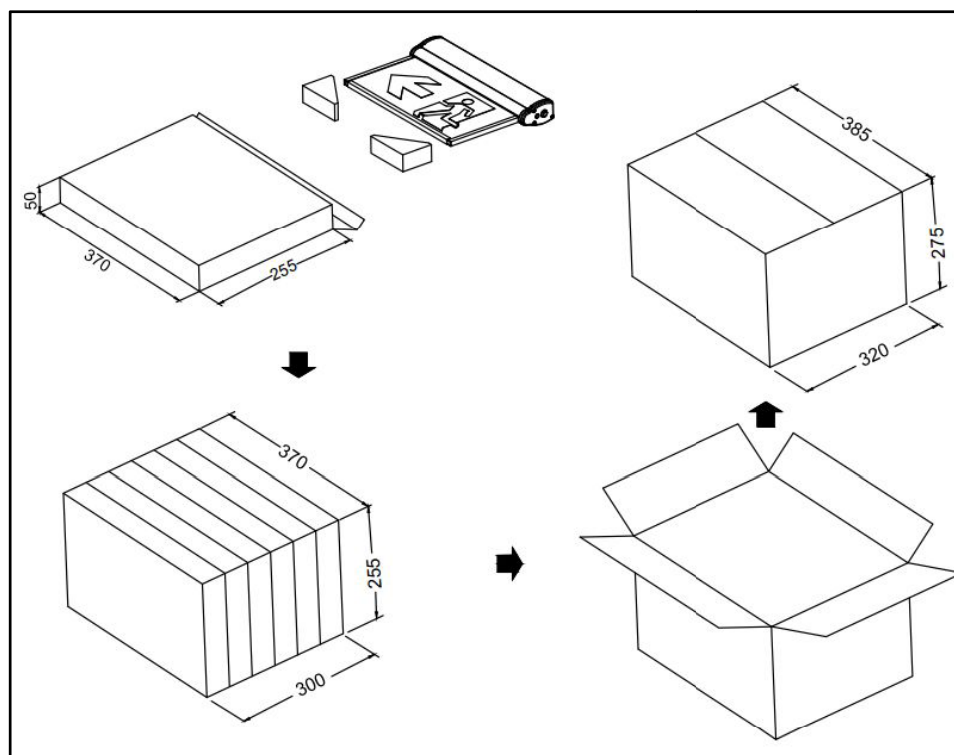

RSER series

Q'TY: 3 PCS
N.W: 8.7 KGS
G.W: 10.5 KGS
MEA'S: 1.57 CUFT

