

VR600 Waterproof Enclosure Specification Sheet


IP65 c  US

WET LOCATION RATED



Je Woo Corporation, Ltd.
Dong Sheng Industrial Park, Dong Sheng Village, Chen Jiang
Subdistrict office, Zhong Kai High-Tech Development Zone, Hui
Zhou City, Guang Dong, P.R.C.
Tel: 86-752-312-5585
Fax: 86-752-312-5586 / 5587


Photo

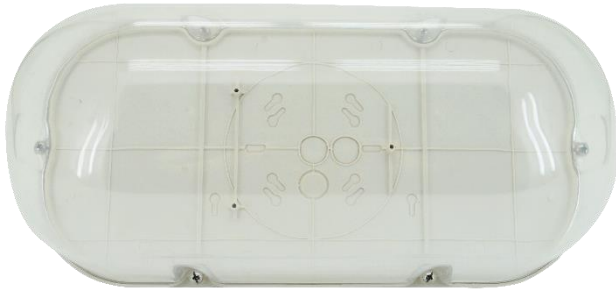

Product Feature

- Waterproof and vandal resistant enclosure.
- Suitable for wet location per UL924.
- IP65 rated per IEC 60529, suitable for outdoor use.
- IK10 according to IEC 62262.
- UV resistant polycarbonate lens.
- Material compliant with the glow wire test at temperature of 850°C.
- Suitable for wall mount and ceiling surface mount.
- Suitable items: EXL-600S, EXL-600L, EXL-660H, EXL-980, EXL-950, EXL-960H, EXL-1960.
- RoHS compliance.

Dimension

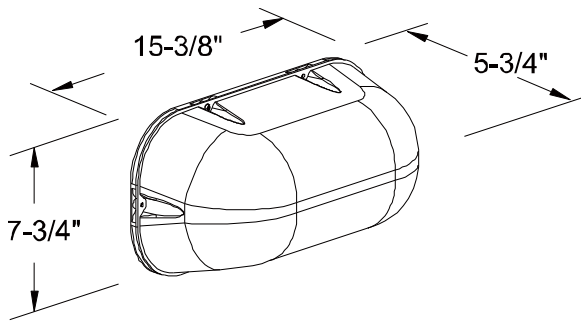

Order

Family

VR600: Waterproof and vandal resistant enclosure

Application



EXL-600+VR600



EXL-1960+VR600



EXL-960HL+VR600




EXL-950+VR600


MOUNTING INSTRUCTIONS

NOTE: First turn off electricity.


1. Open clear cover.

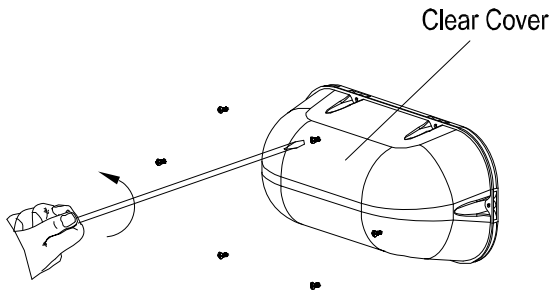


2. Install mounting plate to J-box.

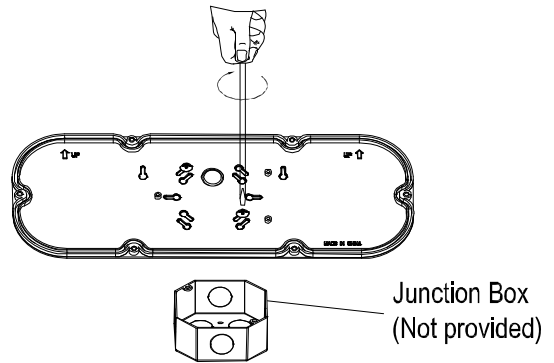


3. Secure emergency lighting fixture back plate to waterproof case back plate, then install the fixture.
(Reference emergency light instruction sheet)

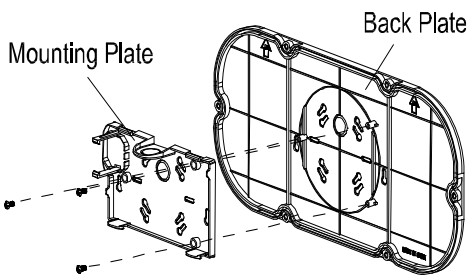

4. After install emergency lighting , assemble clear cover.

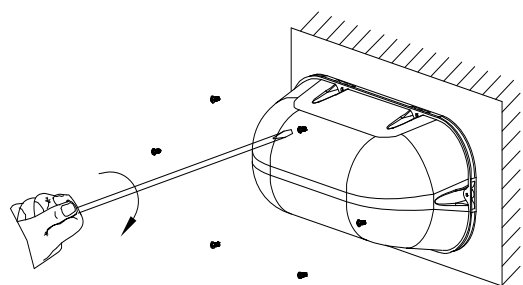

Packaging

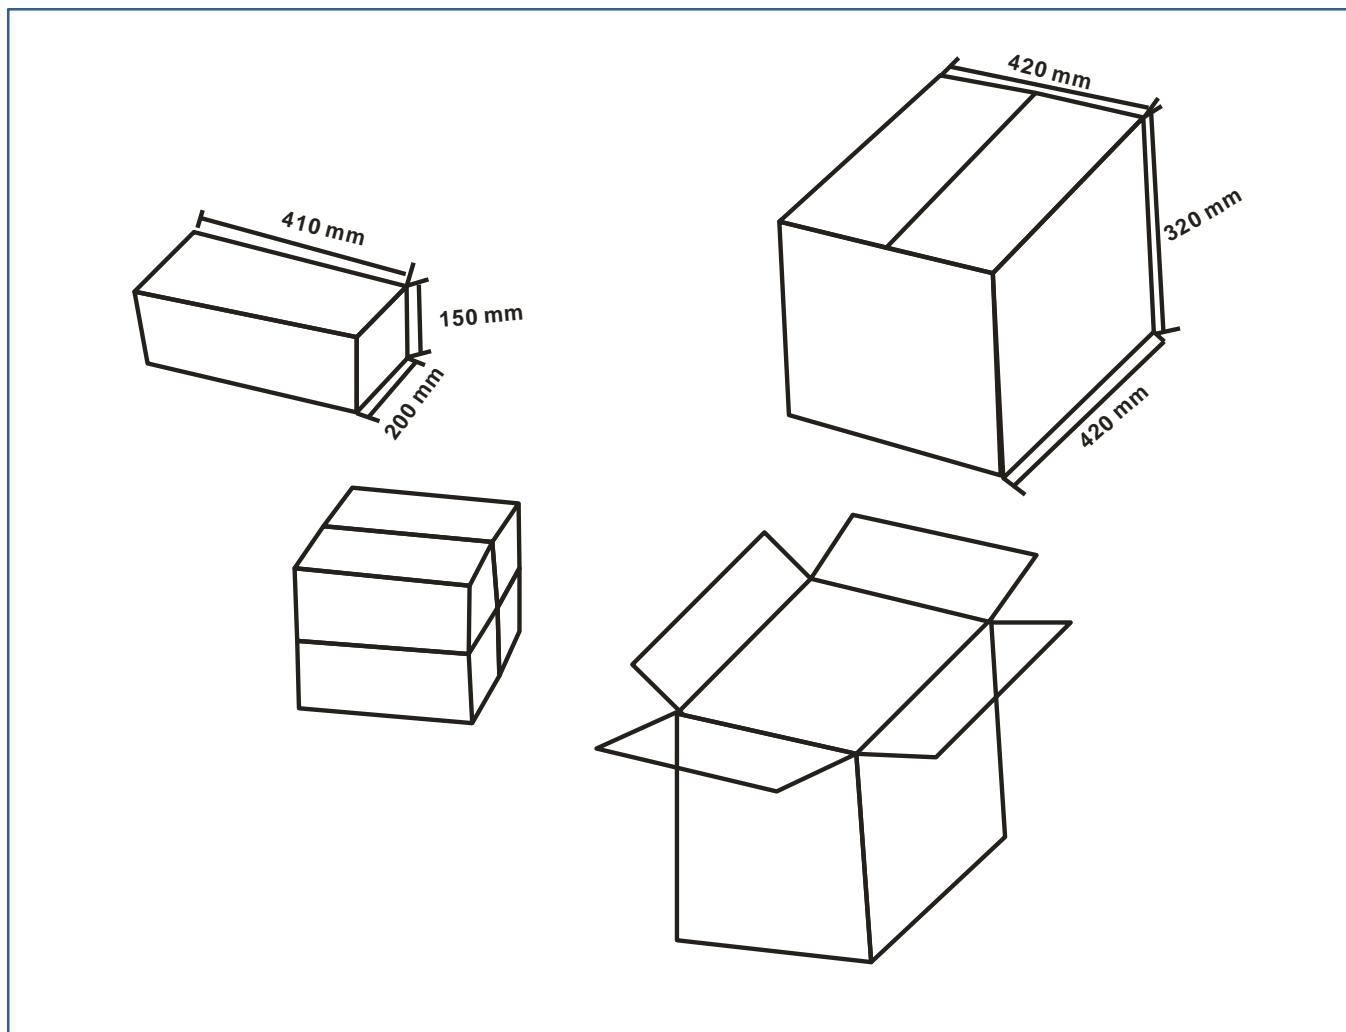

Inner box	Master carton			
	Q'TY	N.W	G.W	MEA'S
W420*D420*H320MM	4PCS	3.00KGS	4.00KGS	2.05 CUFT